

TPH Mineral Insulated Thermocouple Sensor with Nylon Handle


Available with probe diameters ranging from 3.0mm up to 8.0mm, with a probe length to suit your application requirements.

The nylon handle is temperature rated to +135°C and, as standard, the sensors are supplied with a 2 metre long coiled 'curly/telephone' style extension lead which is temperature rated to +110°C.

The extension lead can be supplied with a miniature or standard thermocouple plug fitted, or with tails.

As these sensors are manufactured, the specifications can be tailored to suit your requirements. Speak to our experienced sales team if you require assistance.

- 3.0, 4.5, 6.0 and 8.0mm Ø probe options
- Accuracy to IEC 60584.2 Class 2 (Class 1 also available)
- Nylon handle rated up to +135°C
- Curly lead rated up to +110°C (other styles available)
- Hand-held indicators to suit also available

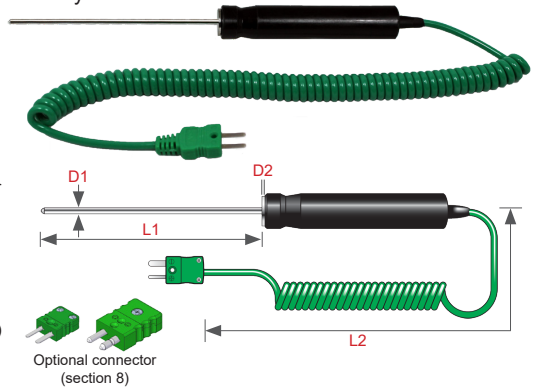


Note: Type K thermocouple shown for illustrative purposes only

1	sensor type			code	
	Mineral Insulated Thermocouple Sensor with Nylon Handle			TPH	
2	conductor/thermocouple type (IEC 60584.1)	conductor temperature range		code	
	Type K	Nickel Chromium vs. Nickel Aluminium		0°C to +1100°C	K
	Type J	Iron vs. Constantan		-50°C to +750°C	J
	Type T	Copper vs. Constantan		-200°C to +350°C	T
	Type N	Nicrosil vs. Nisil		0°C to +1200°C	N
	Type E	Nickel Chromium vs. Constantan		-200°C to +900°C	E
3	metal sheath material	available in thermocouple types	maximum temperature	code	
	321 Stainless Steel	K, J, T, E	+800°C	321	
	310 Stainless Steel	K	+1100°C	310	
	Inconel 600	K, N	+1100°C	600	
	Nicrosil D	K, N	+1300°C	200	
	Also available: Incoloy 800 (+1100°C), 253MA (+1150°C), Alloy C276 (+1100°C). Contact sales for further information.				
4	probe diameter (D1)			code	
	3.0mm			3.0	
	4.5mm			4.5	
	6.0mm			6.0	
	8.0mm			8.0	
Imperial sizes also available.					
5	sensing junction			simplex code	
	Insulated (isolated, ungrounded)			I	
	Grounded (non-isolated)			G	
6	probe length (mm) (L1)			code	
	As required to suit your application (stock sensors also available)			e.g. 300	
7	extension cable length (mm) (L2)	code	extension cable	code	
	As required to suit your application	e.g. 1000	'Curly' lead	CLY	
8	optional thermocouple connector (supplied attached to cable)			code	
	Miniature Thermocouple Plug (Types K, J, T, N, E)			FMP	
	Standard Thermocouple Plug (Types K, J, T, N, E)			RSP	

See pages 53-58 for our full range of connectors.

order code (example)	1	2	3	4	5	6	7	8
	TPH	- K	- 310	- 3.0	- I	- 300	- 1000	CLY - FMP

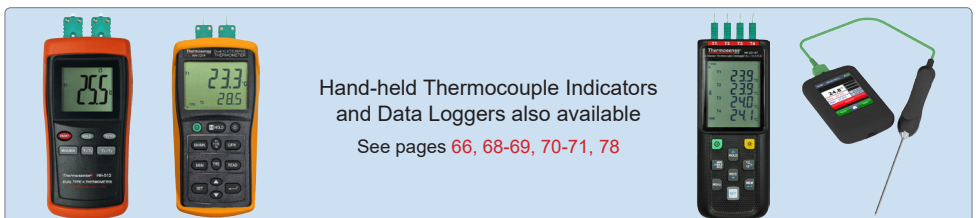

Hand-held Thermocouple Indicators and Data Loggers also available

See pages 66, 68-69, 70-71, 78